




The endless work lights...


LED WORK LIGHTS

Last Forever!

GL-07

INSIDE

I	WORKLIGHTS	
30W COB Rechargeable Worklight	4	
Duo-Play Super Power Rechargeable Floodlight	6	
Heavy Duty Rechargeable COB Worklight	8	
360° Swivel Rechargeable Slim Worklight	10	
360° Swivel Rechargeable Worklight	12	
36W SMD Rechargeable Site Lamp	13	
15W COB Rechargeable Under-hood Light	14	
10W COB Rechargeable Inspection Light with Wireless Charging	16	
12+1 SMD Slim Folding Inspection Light	18	
7W COB Rechargeable Worklight	20	
3W COB Rechargeable Worklight	21	
5W COB Rechargeable Worklight	22	
10W COB Rechargeable Worklight	24	
10W COB Rechargeable Worklight with Bluetooth Speaker	26	
3W COB Rechargeable Pen Light	28	
5W COB Heavy Duty Rechargeable Worklight	29	
30W SMD Site Lamp	30	
60W SMD Site Lamp	31	
9W LED Rechargeable Worklight	32	
15W LED Worklight	33	
18W LED Rechargeable Worklight	34	
20W COB Folding Worklight	35	
2W COB Retractable Worklight	36	
3W LED Inspection Lamp	37	

II	FLASHLIGHTS	
2W COB Rechargeable Pocket Flashlight	39	

3W COB Pocket Flashlight	40
5W SMD Rechargeable Pocket Flashlight	41
3W LED Slim Pen Light	42
5W LED Flashlight With UV & Laser	44
Telescopic Magnetic Pick-Up Light	46
7W LED Waterproof Spotlight	48

III	HEAD LAMPS	
1W LED Rechargeable Head Lamp	50	
3W COB Rechargeable Head Lamp with Sensor	51	
3W LED Headlamp With Sensor	52	
3W COB Head Lamp	53	

IV	FLOODLIGHTS	
12W LED Floodlight	55	
15W LED Floodlight	56	
15W LED 'Super Cool' Floodlight	57	
18W LED 'Super Cool' Floodlight	58	
27W LED Floodlight	59	
30W LED Floodlight	60	
45W LED Floodlight	61	
45W LED Floodlight	62	

V	LIGHT BARS	
36W LED Light Bar	64	
72W LED Light Bar	65	
120W LED Light Bar	66	

TERMS & CONDITIONS

Intellectual Property: The intellectual property of this catalogue is assigned to all countries of the world. Reproduction, full and/or partial adaptation of it's content (content, images, diagrams, icons, specifications, tables etc.) by any means without prior written permission from GROZ entails a violation of GROZ ENGINEERING TOOLS's copyrights and constitutes an act of unfair competition

Technical Data: All drawings, weights, dimensions, the descriptions & illustrations contained in the company's catalogues are only approximate and intended merely to give a general description of the goods described therein.

Specifications: The information contained in this catalogue is as accurate as possible and complies, as far as possible with existing regulations at the time of it's publication - January 2019. We therefore reserve the right to make modifications in line with modifications to regulations and/ or product specifications, drawings, illustrations for continual improvement. Buyers must ensure that goods are suitable for the purpose intended. Imperial dimensions shown as equivalents to metric and vice-versa are approximate.

Delay in Delivery: Delay in completion of work, delivery or in case of a contract for delivery by installments, delay in delivery of an installment shall not give rise to any liability upon the company whether or not any time of date is given in this respect and shall not entitle the customer to terminate the contract.

Liability: All goods are guaranteed to do the work for which they are designed. If the goods or any part thereof are defective solely as a result of faulty materials or workmanship of the company, the company's liability shall be limited, at it's discretion either to replacing such goods or the defective parts. But no such liability shall arise unless notification of any defect is received by the company in writing within 90 days from the receipt of goods by the buyer and the allegedly defective goods are thereafter returned to the company carriage paid with appropriate pre-notification.

Indemnity: The customer shall indemnify the company against all claims in respect of any loss, injury or damage sustained by a third party arising from the sales of the goods to the buyer how so ever caused and also against all actions, proceedings, costs, claims, demands and expenses made, brought or claimed against the company in respect of the infringement of any patent, trademark or registered design.



WORK LIGHTS

01

30W COB
Rechargeable Worklight

Universal dual power worklight for endless applications both indoors & outdoors

30W COB Worklight

Featuring COB technology the GROZ LED/670 delivers extremely high output with uniform and even illumination

Light Output

Single button controlled variable output. Simply push button to change from 50% to full 100% intensity

POWER SOURCE	INTENSITY	LUMEN	RUN TIME
LI-ION BATTERY	100%	2800	2 hours
	50%	1400	4 hours
AC SUPPLY	100%	2800	-

Cool Light

Finned design reduces heating up of light

Sturdy Construction

- a. IP 54 Rated
Protected against dust and effects of water spray from any direction
- b. IK 07 Rated
Impact-proof construction
- c. Corrosion resistant aluminium die cast housing in premium powder coated finish
- d. Rubberised edge guards make the light resistant to shocks and vibrations – common in any working environment

Versatile Use

Can be used as:

- a. Free standing worklight with mounting bracket
- b. On magnetic base - removable magnetic base can be attached onto any metallic surface leaving both hands free
- c. On tripod stand – to light overhead work or minimise shadows when directing the light downwards.

Charge Your Phone

Rechargeable and removable battery pack also doubles as a power bank

Easy Set-up and instant illumination makes it ideal for use as a temporary light on construction sites, in general maintenance workshops etc.

Charge Time

3 hours



CE RoHS IK07

LED-670

LED-670T

FEATURES

MAX. LUMEN	BEAM DISTANCE	BEAM ANGLE
2800	10M (32')	110°
WATER & DUST PROOF RATING	OPERATING TEMPERATURE	
IP54	-5°C TO 40°C (-23°F TO 104°F)	



SCAN TO WATCH




Easily Portable



Mounting bracket pivots full 180° to cast light as required

DUAL POWER SOURCE




RECHARGEABLE BATTERY
7.4V 4400 mAh



Powered with rechargeable Li-ion battery



Rechargeable & removable battery pack can also be used as a power bank



AC POWERED
220V AC, 50Hz
115 V AC, 60Hz



Powered with AC Supply



ORDERING INFORMATION

CAT NR.	ORD NR.	DESCRIPTION	SIZE (L×H×D)		BOX QTY.
			(INCH)	(MM)	
LED/670	55050	Worklight	9.5 x 10 x 5	24 x 26 x 13	4
LED/670T	55077	Worklight mounted on tripod	46 x (48 to 75-1/2) x 46	117 x (122 - 192) x 117	4



02 Duo-Play Super Power Rechargeable Floodlight

4500 lumens of powerful multi-directional flooding output

Light Output
Twin heads deliver high quality, uniform illumination upto 4500 Lumens

Single button controlled multiple settings for optimized control over output and run-time

	MODE-1	MODE-2	MODE-3	MODE-4
INTENSITY	25%	50%	75%	100%
LUMENS	750	1500	3000	4500
RUN TIME	12 hours	6 hours	3.5 hours	2 hours

- Sturdy Construction
- a. IP54 Rated
Protected against dust and effects of water spray from any direction
 - b. IK 07 Rate
Impact-proof nylon body and handle with sturdy polycarbonate lens will stand-up-to tough jobsite conditions

- Versatile Use
- Can be used as
1. Compact and portable, free standing floodlight bright enough to light up large areas
 2. On tripod stand to light overhead work and minimize shadows when directing the light downwards

Replaceable battery back gives infinite life to the worklight. Light has a working life upto 100,000 hours of use






Charging of Battery
100-240V to 20V 1.1A charger(included)

Charge Time
3.5 hours

LITHIUM-ION
RECHARGEABLE

+

RECHARGEABLE
BATTERY
14.8V 5200 mAh

FEATURES				*at 25% intensity
MAX. LUMEN	BEAM ANGLE	BEAM DISTANCE	RUN TIME*	
 4500	 120°	 80M (262')	 12 H	
WATER & DUST PROOF RATING		OPERATING TEMPERATURE		
 IP54		-10 °C TO 40 °C (14 °F TO 104 °F)		



LED-680



LED-680T
Telescopic Tripod
Stand Mounting

0.7m - 1.7m
(27-1/2" - 67")

LED-680

LED-680T

NEW!
CE RoHS IK07


TURN, TWIST TO FOCUS AS REQUIRED




180° Horizontal



Duo Play



90° Vertical



Impact Resistant



Twin heads deliver high quality illumination, lighting up two areas simultaneously

SUPER HEAVY DUTY POWER TOOL BATTERY PACK



14.8V 5200mAh Li-ion Super Heavy Duty Power Tool Battery Pack




Battery Level Indication on battery pack va 5 LED battery level indicator. Each Led indicates 20% charge



In-Built Power Bank in battery pack to charge mobile devices

ORDERING INFORMATION

CAT NR.	ORD NR.	DESCRIPTION	SIZE (L×H×D)	
			(INCH)	(MM)
LED/680	55089	Floodlight	11-3/16 × 7 × 5-1/8	288 × 176 × 131
LED/680T	55090	Floodlight complete with tripod	-	-



03 Heavy Duty Rechargeable COB Worklight

Powerful rechargeable COB worklight designed for the professional user

Available in two versions

- a. LED-550
10W COB
- b. LED-560
20W COB

COB Worklight

Featuring the COB technology these lights deliver extremely high output with uniform and even illumination

Light Output

Single button controlled variable output. Simply push button to change from 50% intensity to full 100% power

	LED/550		LED/560	
WATTS	10W COB		20W COB	
BATTERY	3.7V, 4400mAh Li-ion		7.4V, 4400 mAh Li-ion	
INTENSITY	100%	50%	100%	50%
LUMEN	1000	500	2000	1000
RUN TIME	3 hours	6 hours	3 hours	6 hours
CHARGING TIME	5 hours	5 hours	5 hours	5 hours

Sturdy Construction

- a. IP 54 Rated
Protected against dust and effects of moisture from any direction
- b. IK 07 Rated
Impact proof construction
- c. Corrosion resistant aluminium die cast housing in premium powder coated finish with rubberised edge guards make it resistant to shocks and vibration – common in any working environment

Versatile Use

- Can be used as:
- a. Free standing worklight with mounting bracket that can be rotated 180° to cast light in several directions as per need
 - b. Directly attached to any metallic surface using the magnetic base plate. The magnetic base plate can be easily removed
 - c. Hung from a scaffolding bracket
Handle is designed for direct mounting on the scaffolding bracket leaving both hands free for any other job

Complete with USB cable & magnet holder

Charging of Battery


Battery can be recharged using standard USB cable provided with the light

Charge your Mobile Devices


USB output port for use as power bank



LED-550
10W COB



RECHARGEABLE BATTERY
3.7V 4400 mAh



USB CHARGED



ON/OFF Button

USB Output Port

FEATURES


BEAM ANGLE	BEAM DISTANCE
110°	10M (32')
WATER & DUST PROOF RATING	OPERATING TEMPERATURE
IP54	-5°C TO 40°C (23°F TO 104°F)




SCAN TO WATCH



LED-560
20W COB



RECHARGEABLE BATTERY
7.4V 4400 mAh



USB CHARGED



Impact Resistant Construction



Hands Free Working
Light can be attached onto any metallic surface using removable magnetic base



Compact size making it easy to carry



Battery pack doubles up as a power bank – Charge your phone while you work!

ORDERING INFORMATION

CAT NR.	ORD NR.	DESCRIPTION	SIZE (L×H)		BOX QTY.
			(INCH)	(MM)	
LED/550	55046	10W COB	6-11/16 × 5	170 × 125	10
LED/560	55047	20W COB	7-9/32 × 5-1/2	185 × 140	8


CE RoHS IK07



Use magnetic base to attach to any metallic surface



Mounting bracket can be rotated 180°





04

360° Swivel
Rechargeable Slim Worklight

LED-370

Super slim worklight for all difficult to reach areas, tight and cluttered workspaces with utmost ease

6W COB Light
Featuring COB technology, the Groz LED/370 is an integrated
a. 6W Worklight
b. 1W Top Torch

Light Output
Super slim light offers high quality output as both worklight and spotlight.

Smart design ensures user controlled output. Adjust light intensity from 0-600 lumen by simply rotating the knob as per need

Sturdy Construction
a. **IP 54 Rated**
Protected against dust and effects of water spray from any direction
b. **IK 07 Rated**
Impact Proof Construction ABS body
c. Sturdy polycarbonate lens to withstand the toughest of job site conditions
d. Nylon hook with ratcheting mechanism can be rotated full 360° for convenient placement of light as required

Patented Design
Unique & innovative 360° swivel & tilt mechanism. Stainless steel ball joint mechanism allows
a. Swivelling of light full 360°
b. Tilt


Hands Free Operation
Three rubber covered magnets at the rear end to affix light on any metallic surface leaving both hands free

Power Source

LITHIUM RECHARGEABLE

+

RECHARGEABLE BATTERY 3.7V 2600 mAH

 USB CHARGED

Charging of Battery

Battery can be recharged using in-built micro USB charging port protected by rubber bezel

Comes with 5V braided USB cable

Charge Time
4 hours

ORDERING INFORMATION

CAT NR.	ORD NR.	SIZE (L×H×D)		BOX QTY.
		(INCH)	(MM)	
LED/370	55042	15-11/32 × 1-37/64 × 1-3/8	390 × 40 × 35	15

CE RoHs IK07



Adjust the light intensity via simple to use rotating knob

	WORKLIGHT		TOP TORCH	
	LUMEN	RUN TIME	LUMEN	RUN TIME
FULL INTENSITY	600	1.5 hours	120	10 hours



360° Swivel & tilt design with unique ball joint




Rotating Hook with Ratcheting Mechanism

FEATURES

MAX. LUMEN	WATER & DUST PROOF RATING	BEAM ANGLE	OPERATING TEMPERATURE
600	IP54	120°	-10°C TO +40°C (14°F TO 104°F)

BRING
IN THE
LIGHT!

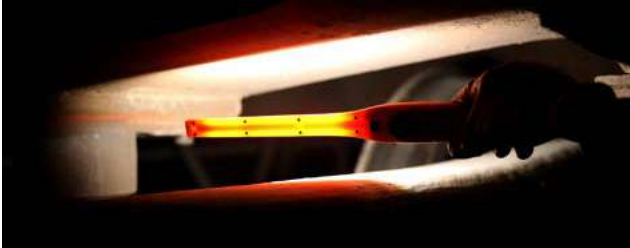

Multi-function, powerful worklight & spotlight in one

Featuring SMD technology, the GROZ LED/360 worklight is powered by 7 SMD. Top torch is powered by 3W LED

Light Output

High quality output in multiple modes

	HIGH INTENSITY		LOW INTENSITY	
	LUMEN	RUN TIME	LUMEN	RUN TIME
WORKLIGHT	400	3 hours	200	7 hours
TOP TORCH	120 lumen with a run time of 8 hours			

Sturdy Construction

- IP 54 Rated**
Protected against dust and effects of water spray from any direction
- IK07 Rated**
Impact proof ABS body
- Sturdy polycarbonate lens to withstand the toughest of job site conditions
- Nylon hooks with ratcheting mechanism can be rotated full 360° for convenient placement of light

Patented Design


Unique & innovative 360° swivel & tilt mechanism. Stainless steel ball joint mechanism allows

- Swivelling of light full 360°
- Tilt

Hands Free Operation

Three magnets; two on the rear of the light & one on the end, can be attached to any metallic surface leaving both hands free

Power Source



RECHARGEABLE BATTERY
3.7V 2200 mAh



USB CHARGED

Charging of Battery

Battery can be recharged using 1m long 5V micro USB cable provided with the light

Charge Time

4 hours

Ideal For

Use in automotive repairs, machinery repairs etc.


ORDERING INFORMATION

CAT NR.	ORD NR.	SIZE		BOX QTY.
		(INCH)	(MM)	
LED/360	55037	10 × 2-9/32 × 1-57/64	254 × 58 × 48	12

CE RoHS IK07



Fully flexible 360° swivel & tilt design with unique ball joint

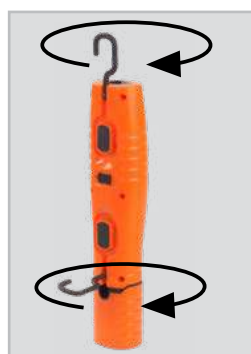

2 fold out 360° swivelling hooks for easy installation



SCAN TO WATCH

FEATURES

MAX. LUMEN	BEAM ANGLE	WATER & DUST PROOF RATING	OPERATING TEMPERATURE
400	120°	IP54	-10°C TO +40°C (14°F TO 104°F)

Multi-mode super bright 36W 72 SMD site lamp

CE RoHS

Light Output

Single button controlled high quality output in multiple modes

	HIGH INTENSITY	MEDIUM INTENSITY	LOW INTENSITY
LUMEN	3000	1500	750
RUN TIME	1.5 hours	2.5 hours	5 hours

Sturdy Construction


- IP65 Rated**
Protected against dust and effects of low pressure water jets from any direction
- Corrosion resistant aluminium die cast construction in premium powder coated finish
- Impact proof ABS frame
- Tempered glass lens
- Steel handle with foam grip for comfort in use
- Sturdy steel stand for balance positioning in the toughest of job site conditions

Patented Design

Unique & innovative 360° swivel & tilt mechanism. Stainless steel ball joint mechanism allows

- Swivelling of light full 360°
- Tilt

Power Source



RECHARGEABLE BATTERY
7.4V 4400 mAh

Charging of Battery

Battery can be recharged using dual voltage 100V-240V AC charger, provided with the light

Charge Time

4.5 hours



Tilt & Swivel to 360°



Power Button

USB Port


3 LED battery level indicator
5V 2.1 Amp USB output port for use as power bank

FEATURES

MAX. LUMEN	WATER & DUST PROOF RATING	BEAM ANGLE	BEAM DISTANCE	OPERATING TEMPERATURE
3000	IP65	120°	45M (147')	-10°C TO 40°C (14°F TO 104°F)

ORDERING INFORMATION

CAT NR.	ORD NR.	SIZE (L×H×D)		BOX QTY.
		(INCH)	(MM)	
LED/660	55043	8.7 × 8.7 × 12.2	223 × 223 × 309	8





Expandable Length
1.2m - 1.76m (47 - 69 inch)

The new super bright under-hood light for powerful illumination of the entire engine bay. Shines brighter, grips stronger & outlasts most other lights!

15W COB Under-hood Light

3 powerful COB lamps of 5W each

Light Output

Single button, user controlled light output for maximized operating time. Choose between three light settings-high, medium & low

	HIGH INTENSITY	MEDIUM INTENSITY	LOW INTENSITY
NR. OF LAMPS USED	3	2	1
LUMEN	1000	700	350
RUN TIME	3-3.5 hours	4.5-5.5 hours	6.5-7.5 hours


Sturdy Construction

- Aluminium extruded body with ABS coating. Built to withstand the toughest of job site conditions
- Soft padded aluminium hooks resist wear and provide scratch proof grip. Large gripping surface provides larger contact for better positioning when mounting the light under-hood, undercarriage or elsewhere
- 3 light bulbs with sturdy polycarbonate lens to withstand the toughest of job site conditions
- Fully adjustable light head: bulbs can be rotated 40° to provide the optimum light angle depending upon job need


Expandable Length

47 - 69 inch (1200 mm - 1750 mm)
This covers wide cars & trucks, making it a perfect choice for mechanics working in automotive shops or fleet maintenance

Power Source



RECHARGEABLE BATTERY
3.7V 5200 mAh



USB CHARGED

Charging of Battery

Battery can be recharged using in-built USB charging port protected by rubber bezel

Complete with USB cable and AC Power Adaptor

Charging Time

4 - 4.5 hours

FEATURES

MAX. LUMEN	BEAM ANGLE	BEAM DISTANCE
1000	60°	48M (157')
OPERATING TEMPERATURE		
-5°C TO 40°C (23°F TO 104°F)		

ORDERING INFORMATION

CAT NR.	ORD NR.	SIZE (L×H×D)		BOX QTY.
		(INCH)	(MM)	
LED/351	55084	47 × 3 × 2-3/8	1210 × 75 × 60	1



Soft padded aluminium hooks for scratch proof grip



USB charging port with LED charge indicators



Light bulbs pivot independently to direct light as needed



08

10W COB Rechargeable Inspection Light with Wireless Charging

LED-375

10 W COB Light

Featuring COB Technology, The GROZ LED 375 is an integrated

- a. 10W COB worklight
- b. 2W SMD top torch

Light Output

High quality light output in multiple modes

	HIGH INTENSITY		MEDIUM INTENSITY		LOW INTENSITY		RED HAZARD FLASHER
	LUMEN	RUN TIME	LUMEN	RUN TIME	LUMEN	RUN TIME	
WORKLIGHT	1000	1.5 hours	500	2.5 hours	250	5 hours	-
TOP TORCH	170 lumen with a run time of 8 hours						

Sturdy Construction

- a. IP65 Rated
Protection against dust and effects of pressure jets from any direction
- b. IK07 Rated
Impact-proof construction
High impact-proof ABS body

Sturdy polycarbonate lens to withstand the toughest of jobs site conditions


Nylon hook with 360° Rotating action for convenient placement of light

Swivelling Magnetic Base:

The base can rotate upto 180° to adjust to the required angle

Strong magnet on the base makes it easy to mount onto any metallic surface for hands free use.

Power Source



RECHARGEABLE BATTERY
3.7V 3350 mAh



USB CHARGED

Dual Battery Charging Options

1. Charge **wirelessly** by using **induction charging technology**, the docking station can be mounted on the wall using nail or latch onto any metallic surface using magnets on the back.
2. Can also additionally be charged using **micro USB cable** provided with the light.

Charging Time

5 hours

Ideal for use in Workshops, Maintenance room etc.

ORDERING INFORMATION

CAT NR.	ORD NR.
LED/375	55085



NEW!

CE RoHS IK07

BATTERY CHARGING OPTIONS



WITH WIRELESS (INDUCTION) CHARGER

Can be mounted on metallic surfaces or hung on the wall using nails or hooks



WITH MICRO USB CABLE

USB charging port with LED charge indicators

SWIVELLING MAGNETIC BASE



The base can rotate upto 180° to adjust to the required angle

FEATURES

MAX. LUMEN	WIRELESS CHARGING	BEAM ANGLE	WATER & DUST PROOF RATING	OPERATING TEMPERATURE
1000	Wireless Charging	50°	IP65	-10°C TO +40°C (14°F TO 104°F)

09

12+1 SMD
Slim Folding Inspection Light

LED-180

The new ultra thin & compact inspection light for difficult to reach & narrow workspaces

Worklight, inspection light and spotlight all in one

12+ 1 SMD Light

- a. Powerful 12 SMD light bar with a spread of upto 120°
- b. 1W SMD Top torch for focused illumination

Light Output

Super slim light offers high quality output as both worklight and spotlight

Smart design ensures user controlled output. Adjust light intensity from 0-400 lumen by simply rotating the knob as per need

Sturdy Construction

- a. Impact proof ABS body
- b. Sturdy polycarbonate lens to withstand the toughest of job site conditions


Compact Folding Design

Fully folded the lamp is reduced to a pocket sized worklight


Hands Free Operation

Three super strong magnets on sides and rear end help affix the light on any metallic surface leaving both hands free

Power Source



RECHARGEABLE BATTERY
3.7V 2000 mAh



USB CHARGED

Charging of Battery

In-built micro USB charging port protected by rubber bezel

Comes complete with 5V braided USB cable

ORDERING INFORMATION

CAT NR.	ORD NR.	SIZE (L×H×D)		BOX QTY.
		(INCH)	(MM)	
LED/180	55045	11-51/64 × 1-49/64 × 1-21/64	300 × 45 × 34	50

CE RoHS IK07



Adjust light intensity via simple to use rotating knob

	INSPECTION LIGHT / WORKLIGHT		SPOTLIGHT		CHARGE TIME
	LUMEN	RUN TIME	LUMEN	RUN TIME	
FULL INTENSITY	400	3 hours	70	8 hours	4 hours



180° rotating light bar folds back to a compact pocket size worklight



Hanging Hook

FEATURES

MAX. LUMEN	BEAM ANGLE	OPERATING TEMPERATURE
400	120°	-10°C TO +40°C (14°F TO 104°F)



BRING
IN THE
LIGHT!

10

7W COB Rechargeable Worklight

LED-345

7W COB LED Worklight

Featuring the COB LED technology the GROZ LED/345 delivers bright and high output per square inch with even illumination

Battery Powered Input

Light works on rechargeable 3.7V, 4400 mAh lithium ion battery

In-built overcharge/discharge control with automatic cut-off enhances battery life & performance

Light Output

Single button controlled variable output with a maximum output of 650 lumen flood beam

MODES	HIGH INTENSITY	MEDIUM INTENSITY	LOW INTENSITY
LUMEN	650	400	200
RUN TIME	4 hours	6 hours	11 hours

Construction

Lightweight yet rugged aluminium tubing with TPR grip makes it impact resistant

Hands free usage

Attach light to any metallic surface leaving both hands free

2 ratcheting hooks with 360° swivel movement

Recharging of Battery

Battery can be recharged using standard 1m long USB cable


Charge Time

6 hours

Charging level indicators clearly marked

- a. **GREEN:** Full Charge
b. **RED:** Charging in process

Power Source



RECHARGEABLE BATTERY
3.7V 4400 mAh



USB CHARGED



ORDERING INFORMATION

CAT NR.	ORD NR.	SIZE (L×H×D)		BOX QTY.
		(INCH)	(MM)	
LED/345	55040	18 × 3-3/16 × 2-49/64	458 × 81 × 70	10

FEATURES

MAX. LUMEN	OPERATING TEMPERATURE	BEAM ANGLE
650	-10°C TO 40°C (-23°F TO 104°F)	120°

11

3W COB Rechargeable Worklight

LED-390

Multi-function, powerful worklight & top torch

COB Worklight

Featuring COB technology the worklight delivers extremely high output with uniform and even illumination

Top Torch is powered by 1W LED

Light Output

High quality output of 160 lumen by main light & focused illumination of 60 lumen by top torch


Durable Construction

- Impact proof & water resistant ABS body with rubber coating
- 360° rotating hook to suspend light leaving both hands free
- Integrated pocket/belt clip to conveniently store and carry light wherever you go
- Swivelling magnetic stand swivels up to 180° to adjust to required angle


Hands Free Operation

- Swivelling stand with super strong magnets to position light on any metallic surface
- Magnet on clip can also be used to affix light on any metal surface

Power Source



RECHARGEABLE BATTERY
3.7V 1200 mAh




USB CHARGED

Charging of Battery

Battery can be recharged using a micro USB cable provided with the light. Micro USB port is protected by rubber bezel

Charge Time

2.5 - 3 hours; charge display via 5 green LED's, each showing 20% charge



Swivelling Magnetic Stand



Rotating Hook



Pocket / Belt Clip



Multiple Mode Output

	DESCRIPTION
1ST PRESS	Top torch switches On
2ND PRESS	Main worklight switches On
3RD PRESS	All lights switch Off

FEATURES

MAX. LUMEN	RUN TIME	BEAM ANGLE
160	2.5-3 H	120°
OPERATING TEMPERATURE		
-10°C TO +50°C (14°F TO 122°F)		

ORDERING INFORMATION

CAT NR.	ORD NR.	SIZE (L×H×D)		BOX QTY.
		(INCH)	(MM)	
LED/390	55059	6-7/64 × 1-37/64 × 1-11/64	155 × 40 × 30	50



SCAN TO WATCH

Multi-function, powerful worklight & top torch

COB Worklight

Featuring COB technology the worklight delivers extremely high output with uniform and even illumination

Top Torch is powered by 3W LED

Light Output

High quality output, both as a worklight & top torch

Smart design ensures user controlled output. Adjust light intensity of worklight and top torch by pressing on the increase (+) or decrease (-) buttons

Built-in memory function starts the light at the same intensity as when it was switched off


Durable Construction

- Impact proof & water resistant ABS body with rubber coating
- 360° rotating hook to suspend light leaving both hands free
- Integrated pocket/belt clip to conveniently store and carry light wherever you go. Clip also has a magnet to attach light to any metallic surface
- Swivelling Stand: Can be rotated full 180° to position light as needed


Hands Free Operation

- Swivelling stand with super strong magnets to position light on any metallic surface
- Magnet on clip can also be used to affix light on any metal surface

Power Source



RECHARGEABLE
BATTERY
3.7V 2000 mAh



USB
CHARGED

Charging of Battery

Battery can be recharged using a micro USB cable provided with the light. Micro USB port is protected by rubber bezel

Charge Time

2.5 - 3.5 hours (indicated via LED display). Charge display via 5 LED's, each showing 20% charge

Charge Your Mobile Device

USB output port for use as power bank

ORDERING INFORMATION

CAT NR.	ORD NR.	SIZE		BOX QTY.
		(INCH)	(MM)	
LED/395	55060	7-9/32 × 2-3/8 × 1-17/64	185 × 60 × 32	50



Multiple Mode Output

	DESCRIPTION
1ST PRESS	Top torch switches On
2ND PRESS	Main Worklight switches On
3RD PRESS	All lights switch Off

FEATURES


MAX. LUMEN	BEAM ANGLE	OPERATING TEMPERATURE
350	120°	-10°C TO +50°C (14°F TO 122°F)



	WORKLIGHT		TOP TORCH	
	LUMEN	RUN TIME	LUMEN	RUN TIME
FULL INTENSITY	350	2.5 - 3.5 hours	180	3.5 - 4.5 hours



USB output port to charge mobile devices



SCAN TO
WATCH



Swivelling Magnetic Stand: The base can swivel upto 180° to adjust to the required angle. The magnetic end helps affix the light for hands free use



Rotating Hook



Pocket / Belt Clip

Multi-function, powerful worklight & top torch

COB Worklight

Featuring COB technology the worklight delivers extremely high output with uniform and even illumination

Top Torch is powered by 3W LED

Light Output

High quality output, both as a worklight & top torch

Smart design ensures user can control the output. Adjust light intensity of worklight and top torch by pressing ON/OFF buttons continuously


Durable Construction

- Impact proof & water resistant ABS body with rubber coating
- Integrated pocket/belt clip to conveniently store and carry light wherever you go. Clip also has a magnet to attach light to any metallic surface
- Swivelling Stand: Can be rotated full 180° to position light as needed

Hands Free Operation

- Swivelling stand with super strong magnet to position light on any metallic surface
- Magnet on clip can also be used to affix light on any metal surface

Power Source



RECHARGEABLE BATTERY
3.7V 2000 mAh



USB CHARGED

Charging of Battery

Battery can be recharged using Micro USB cable provided with the light. USB port is protected by rubber bezel

Charge Time

3 - 3.5 hours (indicated via LED display). LED Charging shown with display in percentage

Charge Your Mobile Device

USB output port for use as power bank

ORDERING INFORMATION

CAT NR.	ORD NR.	SIZE	
		(INCH)	(MM)
LED/396	55088	6-21/32 x 1-47/64 x 1-11/32	169x44x34



3W LED top torch

10W COB main light



Aluminium back for better heat dissipation

Magnetic on Back

Power button

LCD display to show charge levels in % of Battery remaining



Swivelling Magnetic Stand: The base can swivel upto 180° to adjust to the required angle. The magnetic end helps affix the light for hands free use



Rotating Hook



Pocket / Belt Clip




USB output port to charge mobile devices

Working Mode

	1ST PRESS	2ND PRESS	3RD PRESS	4TH PRESS
	TOP TORCH	WORKLIGHT	CONTINUOUS RED LIGHT	RED SOS FLASHING
LUMEN	150	500		
RUN TIME	3-3.5 hours	2-3 hours		

FEATURES

MAX. LUMEN	WATER & DUST PROOF RATING	BEAM ANGLE	OPERATING TEMPERATURE
500	IP44	270°	-10°C TO +50°C (14°F TO 122°F)



SCAN TO WATCH

Multi-function, powerful worklight & top torch with a powerful speaker

COB Worklight

Featuring COB technology the worklight delivers extremely high output with uniform and even illumination

Top Torch is powered by 3W LED

Light Output

High quality output in multiple modes

User controlled output by pressing the increase (+) or decrease (-) buttons

Powerful Bluetooth Speaker

Superior sound quality bluetooth speaker range upto 10 meter (32') for endless music at work

Press and hold the ON button for switching on the Bluetooth connect to "BT500" from your phone


Durable Construction

Impact proof & water resistant ABS body with rubber coating

Hands Free Operation

180° Swivelling stand with super strong magnets to position light on any metallic surface

Power Source



RECHARGEABLE BATTERY
3.7V 2400 mAh



USB CHARGED

Charging of Battery

Fast Charge using Type C USB cable provided with the light. USB port protected by rubber bezel

Charge Time

2 - 2.5 hours (indicated via LED display showing charge level in percentage)

Charge Your Mobile Device

USB output port for use as power bank

Working Mode

	1ST PRESS	2ND PRESS	3RD PRESS	4TH PRESS
	TOP TORCH	WORKLIGHT	CONTINUOUS RED LIGHT	RED FLASHING
LUMEN	200	500		
RUN TIME	3-3.5 hrs	2.5-3 hrs		

ORDERING INFORMATION

CAT NR.	ORD NR.	SIZE	
		(INCH)	(MM)
LED/397	55092	6-9/64 × 2-23/32 × 1-7/32	156×69×31



3W LED top torch



10W COB Main Light



OLED screen real time display of Lumens and battery level

Power button


Intensity control buttons

NEW!

CE RoHS



Enjoy endless music at work

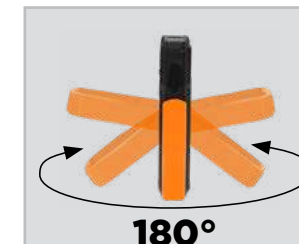


180°




Swivelling Magnetic Stand: The base can swivel upto 180° to adjust to the required angle. The magnetic end helps affix the light for hands free use



To activate Bluetooth, press and hold the ON button for switching on the Bluetooth mode and connect to "BT500" from your phone

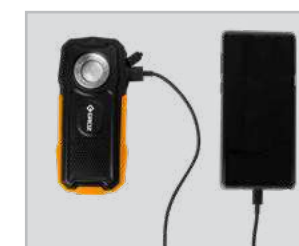

USB output port to charge mobile devices



FEATURES

MAX. LUMEN	BLUETOOTH	WATER & DUST PROOF RATING
500		IP65
BEAM ANGLE	OPERATING TEMPERATURE	
120°	-20°C TO +40°C (-4°F TO 104°F)	



SCAN TO WATCH

15

3W COB Rechargeable Pen Light

LED-335

Super bright, dual function portable worklight & top torch

3W COB Light

Featuring COB technology, the GROZ LED/335 is an integrated 3W COB worklight & 1W LED top torch

Light Output

High quality output in different modes

	MAIN LIGHT		TOP TORCH	
	LUMEN	RUN TIME	LUMEN	RUN TIME
FULL INTENSITY	180	1.5-2 hours	65	2-2.5 hours


Light Weight & Durable Construction

- Impact proof & water resistant ABS body with rubber coating
- Integrated Pocket Clip: Can be hooked onto a pocket /belt for easy mobility & hands free operation. Clip is adjustable up to 120° for directing light in desired direction

Hands Free Use

Magnet on clip can be used to affix light on any metal surface

Power Source



RECHARGEABLE BATTERY
3.7V 800 mAh



USB CHARGED

Charging of Battery

Battery can be recharge using a micro USB cable provided with the light. Micro USB port is protected by plastic bezel

Charge Time

2.5 - 3.5 hours

FEATURES

MAX. LUMEN	BEAM ANGLE	OPERATING TEMPERATURE
180	120°	-10°C TO +50°C (14°F TO 122°F)

ORDERING INFORMATION

CAT NR.	ORD NR.	SIZE (L×H×D)		BOX QTY.
		(INCH)	(MM)	
LED/335	55057	7-9/32 × 1-25/64 × 13/16	185 × 35 × 20	50



SCAN TO WATCH



85° Adjustable Pocket Clip with magnet to hook onto any magnetic surface

CE RoHs



16

5W COB Heavy Duty Rechargeable Worklight

LED-380

Portable worklight - ideal for outdoor applications

5W COB LED Worklight

Featuring COB LED technology the GROZ LED/380 delivers bright and high output per square inch with even illumination

Light Output


Single button controlled output

	TYPE	RUN TIME
1st Press	White floodlight	4 hours
2nd Press	Red light	4 hours
3rd Press	Red Hazard flasher	10 hours


Durable Construction

Light weight yet sturdy aluminium tubing with TPR grip makes the light impact resistant

Power Source



RECHARGEABLE BATTERY
3.7V 2200 mAh



USB CHARGED

Unique Battery Charging Options

- Magnetic docking station with USB cable
- USB cable with magnetic button charger

Hands Free Usage

Super strong magnet on light base makes it convenient to mount light on any metallic surface leaving both hands free

Charge Time

4.5 hours

FEATURES

MAX. LUMEN	OPERATING TEMPERATURE
400	-10°C TO 40°C (14°F TO 104°F)

ORDERING INFORMATION

CAT NR.	ORD NR.	SIZE		BOX QTY.
		(INCH)	(MM)	
LED/380	55058	7-51/64 × 1-1/16 × 1-3/16	198 × 27 × 30	36

BATTERY CHARGING OPTIONS



Magnetic docking station charger



Magnetic button USB cable



30W SMD Site Lamp

Powerful 28 SMD's

Light Output

High quality output of 2100 lumen for maximum coverage of workspace

Cool Light

Finned design reduces heating up of light

Sturdy Construction


- IP 65 Rated**
Protected against dust and effects of pressure jets from any direction
- Corrosion resistant aluminium die-cast housing in premium powder coated finish
- High impact polycarbonate lens to withstand harsh job site conditions
- Complete with 4m long power cord

Easily Portable

Free standing steel stand with cushion grip and adjustable bracket makes it convenient to move light as required in the workspace

Easy Set-up and instant illumination

Power Source



AC POWERED
220V AC, 50Hz
110V AC, 60Hz

Ideal For


Use as a temporary light on construction sites, in general maintenance workshops etc.

FEATURES

LUMEN	BEAM ANGLE	WATER & DUST PROOF RATING
2100	110°	IP65
OPERATING TEMPERATURE		
-20°C TO 45°C (-4°F TO 113°F)		

ORDERING INFORMATION

CAT NR.	ORD NR.	PLUG TYPE	SIZE (L×H×D)		BOX QTY.
			(INCH)	(MM)	
LED/602/US	55075	US Pin	9-1/16 × 14-3/16 × 8	230 × 360 × 205	8
LED/602/EU	55069	EU Pin	9-1/16 × 14-3/16 × 8	230 × 360 × 205	8



CE RoHs

60W SMD Site Lamp

2 Powerful 28 SMD lights

Light Output

High quality output of 4200 lumen for maximum coverage of workspace


Cool Light

Finned design reduces heating up of light

Sturdy Construction

- IP 65 Rated**
Protected against dust and effects of pressure jets from any direction
- Corrosion resistant aluminium die-cast housing in premium powder coated finish
- Portable Tripod**
Telescopic stand can be extended from 0.8m - 1.72m (31 - 67 inch) to light overhead work or minimise shadows when casting light downwards
- Complete with 4m long power cord

Power Source



AC POWERED
220V AC, 50Hz
110V AC, 60Hz

Ideal For

Easy Set-up and instant illumination makes it ideal for use as a temporary light on construction sites, in general maintenance workshops etc.

FEATURES


LUMEN	BEAM ANGLE	WATER & DUST PROOF RATING
4200	110°	IP65
OPERATING TEMPERATURE		
-20°C TO 45°C (-4°F TO 113°F)		

ORDERING INFORMATION

CAT NR.	ORD NR.	PLUG TYPE	SIZE (L×H×D)		BOX QTY.
			(INCH)	(MM)	
LED/612/US	55076	US Pin	37 × 68-3/32 × 37	940 × 1730 × 940	2
LED/612/EU	55070	EU Pin	37 × 68-3/32 × 37	940 × 1730 × 940	2



Telescopic
0.8m - 1.72m
(31 - 67 inch)



CE RoHs

19

9W LED Rechargeable Worklight

LED-640

LED-650

9W Rechargeable Worklight

Light Output

High quality & uniform output of 500 lumen

Dual Colour Output

- White
- Amber

Sturdy, Weather Proof Construction


- IP 65 Rated**
Protected against dust and effects of low pressure water jet from any direction
- Corrosion resistant aluminium die cast housing in premium powder coated finish

Available in 2 versions


- LED-640:** with strong & sturdy steel base for balanced positioning in the toughest of environments
- LED-650:** with magnetic base; conveniently attaches to any metallic surface leaving both hands free

270° pivoting head directs the light beam to the required direction

Power Source



RECHARGEABLE BATTERY
3.7V 6600 mAh



USB CHARGED

Charging of Battery

Battery can be recharged using USB cable provided with the light.

Charge Time

8-10 hours

Ideal For Portable Working

In maintenance, building construction, temporary lighting jobs etc.

FEATURES

LUMEN	BEAM ANGLE	BEAM DISTANCE	RUN TIME
500	60°	10M (32')	4 H
WATER & DUST PROOF RATING	OPERATING TEMPERATURE		
IP65	-10°C TO 45°C (14°F TO 113°F)		

ORDERING INFORMATION

CAT NR.	ORD NR.	SIZE (L×H×D)		BOX QTY.
		(INCH)	(MM)	
LED/640	55035	5-53/64 × 7-31/32 × 4-59/64	148 × 202 × 125	12
LED/650	55036	5-23/32 × 7-11/64 × 3-21/32	145 × 182 × 93	12

LED-640



RoHs





SCAN TO WATCH

270° Rotation

LED-650



270° Rotation



20

15W LED Worklight

LED-630

15W LED Worklight

5 powerful LED's of 3W each


Light Output

Portable worklight offers high quality output of 900 lumen with a spread 60° wide over a distance of 10 meter


Weather Proof Construction

- IP 67 Rated**
Protected against dust and effects of water immersion up to 1 meter
- Corrosion resistant aluminium die cast housing in premium powder coated finish
- Sturdy polycarbonate lens to withstand the toughest of job site conditions
- Free standing base with magnet attaches conveniently to any metallic surface

Power Source



DC POWERED
12V DC - 36V DC



CIGARETTE PLUG

Ideal For Outdoor Use

Use on off road vehicles, construction equipment, tractors, farm machinery etc.

FEATURES

LUMEN	BEAM ANGLE	BEAM DISTANCE
900	60°	10M (32')
WATER & DUST PROOF RATING	OPERATING TEMPERATURE	
IP67	-20°C TO 45°C (-4°F TO 113°F)	

ORDERING INFORMATION

CAT NR.	ORD NR.	SIZE (L×H×D)		BOX QTY.
		(INCH)	(MM)	
LED/630	55034	3-17/32 × 12-3/8 × 3-27/64	90 × 314 × 87	12

RoHs



Cigarette plug adaptor



270° Rotation



18W LED Worklight
6 powerful LED's of 3W each

Light Output
High quality of 1,000 lumen


Multiple Working Modes
High intensity, low intensity & SOS flashing

	MODE 1	MODE 2	MODE 3
TYPE	High Intensity	Low Intensity	SOS Flashing
RUN TIME	3-3.5 hours	10.5-11 hours	
LUMEN	1000	300	

Weather Proof Construction

- IP65 Rated**
Protected against dust and effects of low pressure water jets from any direction
- Corrosion resistant aluminium die cast construction in premium powder coated finish
- Free standing heavy duty magnetic base
- Sturdy polycarbonate lens to withstand the toughest of job site conditions

Power Source



Charging of Battery

Battery can be recharged using USB cable provided with the light.

Charge Time
7-8 hours

Ideal For Portable Working

In maintenance, building, construction, mining jobs etc.

FEATURES

MAX. LUMEN	BEAM ANGLE	BEAM DISTANCE
1000	60°	10M (32')
WATER & DUST PROOF RATING	OPERATING TEMPERATURE	
IP65	-20°C TO 45°C (-4°F TO 113°F)	

ORDERING INFORMATION

CAT NR.	ORD NR.	SIZE (L×H×D)		BOX QTY.
		(INCH)	(MM)	
LED/621	55044	5-1/16 × 9-19/32 × 4	129 × 244 × 100	12

CE RoHS CREE



Finned design offers excellent heat dissipation



Twin-head light for endless applications; both indoors and outdoors

High Output
Twin-heads deliver high quality and uniform illumination up to 600 lumens

Heads can be used separately or both together for all-around illumination

Single push-button controlled output

	1ST PRESS	2ND PRESS	3RD PRESS
	BOTH LIGHTS ON	LIGHT 1 ON	LIGHT 2 ON
LUMEN	600	450	450
RUN TIME	4 hrs	4 hrs	4 hrs


Sturdy Construction

Impact-resistant nylon body with protective TPR corners

Nylon handle makes it convenient to carry around swivels full 360° for complete adjustment as needed

Handle also doubles up as a stand for convenient placement on a flat surface

Power Source



Suitable for both indoor & outdoor applications:
Automotive, Industrial, Construction, Camping etc.

FEATURES

MAX. LUMEN	BEAM DISTANCE
600	20M (65')
OPERATING TEMPERATURE	
-5°C TO 40°C (23°F TO 104°F)	

ORDERING INFORMATION

CAT NR.	ORD NR.
LED/385	55086

NEW!



TWIN-HEAD DESIGN

SWIVEL HANDLE



Quick repairs under the hood



Best suitable for vehicle underbody maintenance

23

2W COB Retractable Worklight

LED-305

Compact retractable flashlight and spotlight in one. Pull to switch On and push back to switch Off

2W COB flashlight & 1W LED spotlight

COB Worklight

Featuring COB technology, the light delivers high output with uniform and even illumination

1W LED Top Torch

For focussed illumination over long distances

Light Output

High quality output with wide spread illumination

	FLASHLIGHT	SPOTLIGHT/ TOP TORCH
LUMEN	170	40
RUNTIME	7 hours	14 hours

Sturdy Construction

- Impact proof ABS body
- Rubberised coating on grip for comfort in use
- 90° Tilting Head: Head can be tilted 90° to focus in-built spotlight beam as required


Hands Free Operation

Magnet at rear end of light can be attached to any metallic surface leaving both hands free

Expandable Length

7-31/64 - 10-41/64 inch
(190 - 270 mm)

Power Source



3 × AAA ALKALINE
BATTERIES
(provided with
light)

CE RoHS



Pull up to
Turn on the worklight

Expandable Length
7-31/64 - 10-41/64 inch
(190 mm - 270 mm)

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY
LED/305	55054	20

FEATURES

MAX. LUMEN	BEAM ANGLE	OPERATING TEMPERATURE
170	100°	-5°C TO 40°C (-23°F TO 104°F)

24

3W LED Inspection Lamp

LED-321

24 LED inspection Lamp

Light Output

Super bright output of 110 lumen


Construction

- Impact resistant ABS body
- Integrated hook that can be swivelled 360° to position light as required

Hands Free Use

Powerful magnet built into back of light can be affixed onto any metallic surface leaving both hands free

Power Source



3 × AA BATTERIES
(included)



Magnets on the back help affix the light on any metallic surface leaving both hands free

CE



On/Off
button

FEATURES

MAX. LUMEN	RUN TIME	BATTERY INCLUDED
110	4 H	3 AA
OPERATING TEMPERATURE		
-5°C TO 40°C (-23°F TO 104°F)		

ORDERING INFORMATION

CAT NR.	ORD NR.	SIZE (L×H×D)		BOX QTY.
		(INCH)	(MM)	
LED/321	55078	8-17/64 × 2-23/64 × 1-11/64	210 × 60 × 30	50



Swivel hook adjusts to different angles



Strong magnet attaches to most metal surfaces



25

2W COB Rechargeable Pocket Flashlight

LED-150

CE RoHs

Super bright pocket flashlight

2W COB Flashlight

Featuring COB technology, flashlight delivers very high output with uniform and even illumination


Light Output

200 Lumen of extremely bright light


Durable Construction

- a. Impact proof and water resistant ABS body with rubber coating
- b. 360° rotating hook to position light in any direction
- c. Integrated pocket/belt clip to conveniently store and carry the light
- d. Swivelling magnetic stand with strong magnet to position at any angle on a metallic surface

Power Source



RECHARGEABLE
BATTERY
3.7V 1800 mAH



USB
CHARGED

Charging of Battery

Battery can be recharged using a micro USB cable provided with the light.

Micro USB port is protected by rubber bezel

Charge Time




3 hours

Charge your Mobile Devices

Output port for use as power bank



FEATURES

LUMEN	RUN TIME	BEAM ANGLE
 200	 3 H	 90°
OPERATING TEMPERATURE		
-5°C TO 40°C (23°F TO 104°F)		



Power Bank
5V 1 Amp USB output port for use as power bank



Can be hooked onto a Belt / Pocket for easy mobility

ORDERING INFORMATION

CAT NR.	ORD NR.	SIZE (L×H×D)		BOX QTY.
		(INCH)	(MM)	
LED/150	55049	2-3/8 × 1-3/8 × 4-27/32	60 × 35 × 123	20



SCAN TO
WATCH

26

3W COB
Pocket Flashlight

LED-140

3W COB LED Light
Featuring COB technology, the GROZ LED 140 is a handy pocket flashlight

Light Output
Super bright & uniform flooding illumination of 150 lumen

Durable Construction
a. Impact proof & water resistant ABS body in matte black finish
b. Integrated pocket clip to conveniently carry the light around

Hands Free Operation
a. Magnet on clip can also be used to affix light on any metal surface

Power Source

DRYCELL

+

3 × AAA ALKALINE BATTERIES (INCLUDED)



FEATURES

LUMEN	RUN TIME
150	4 H
BEAM ANGLE	
180°	

HANDS FREE USE



Can be hooked onto a pocket or belt for easy mobility & hands free use



Magnetic clip to attach light to any metallic surface for hands free usage

ORDERING INFORMATION

CAT NR.	ORD NR.	SIZE (L×H×D)		BOX QTY.
		(INCH)	(MM)	
LED/140	55039	4-11/32 × 1-3/16 × 23/32	110 × 55 × 21	24

27

5W SMD
Rechargeable Pocket Flashlight

LED-190

Pocket sized, rechargeable high quality flashlight for the professional user

5W SMD Flashlight

Light Output
High quality flooding beam adjustable to a maximum of 500 lumens

STEP 1	Press On/Off to switch on the light
STEP 2	Press On/Off again & hold to adjust light intensity between 50-500 lumens

Unique 'Lock-Out' Transport Lock Feature
No more accidental switching on, no more wastage of battery power

Light can be switched off and locked before keeping in the pocket. Press & hold light switch until the light blinks twice to activate 'Lock Out' mode. A very useful feature when carrying light in a pocket

Built-in memory function:
Starts light at the same intensity as when it was switched off

Robust Construction
a. Corrosion resistant aluminium alloy construction
b. Pocket clip for convenient and safe portability
c. Integrated hook for hanging light


Hands Free Use
Magnetic base makes it easy to mount light on any metallic surface leaving both hands free

Power Source

LITHIUM RECHARGEABLE

+

RECHARGEABLE BATTERY 3.7V 1800 mAh



Charging of Battery
Battery can be recharged using built-in micro USB charging port protected by a rubber bezel

Includes USB charging cable

Charge Time
3.5 hours



ORDERING INFORMATION

CAT NR.	ORD NR.	SIZE (L×H×D)		BOX QTY.
		(INCH)	(MM)	
LED/190	55081	4-3/16 × 1-25/32 × 1-15/32	106 × 48 × 36.5	48

CE RoHs



FEATURES

LUMEN	RUN TIME	BEAM DISTANCE	BEAM ANGLE
500	2.5 H	28M (92')	70°
OPERATING TEMPERATURE			
-20°C TO +40°C (68°F TO 104°F)			



Pocket clip with integrated hook



USB charging port protected by rubber bezel

28

3W LED Slim Pen Light

LED-160

LED-160R

Extra-ordinary, high quality slim pen light designed for the professional user

Light Output
Multiple modes with just the press of a button

Light output reaches up to a distance of 50 metres (164 feet)

- Robust Construction**
- a. **IP 54 Rated**
Protected against dust and effects of water spray from any direction
 - b. Robust aluminium body makes the light usable even in rugged conditions
 - c. Military grade anodised coating for enhanced durability
 - d. Non-slip knurled grip
 - e. Integrated pocket clip for easy and safe portability

Unique L-Head Design
Head can be turned 90° giving the user freedom to direct light beam as required

Hands Free Operation
Super strong magnet at the rear end can be affixed onto any metallic surface leaving both hands free

- Available in two versions**
- a. **Drycell: LED-160**
Runs on 2xAAA drycell batteries
 - b. **Rechargeable: LED-160R**
Runs on 600mAh lithium-ion battery with an in-built micro USB port or 2xAAA drycell batteries



LED-160
DRYCELL

2 × AAA BATTERIES (not included)



LED-160R (DUAL POWER SOURCE)
RECHARGEABLE

RECHARGEABLE BATTERY 3.7V 600 mAh (included)

2 × AAA BATTERIES (not included)

MAX. LUMEN	BEAM ANGLE	BEAM DISTANCE
150	20°	50M (164')
WATER & DUST PROOF RATING	OPERATING TEMPERATURE	
IP54	-20°C TO +50°C (68°F TO 122°F)	

Multiple Mode Output				
	1ST PRESS	2ND PRESS	3RD PRESS & HOLD	4TH PRESS
	HIGH INTENSITY	LOW INTENSITY	QUICK FLASHING	SOS FLASHING
LUMEN	150	60	●●●●●●●●	●●●●●●●●
RUN TIME	2.5 hrs	8 hrs		

Multiple Mode Output				
	1ST PRESS	2ND PRESS	3RD PRESS & HOLD	4TH PRESS
	HIGH INTENSITY	LOW INTENSITY	QUICK FLASHING	SOS FLASHING
LUMEN	150	60	●●●●●●●●	●●●●●●●●
RUN TIME	2.5 hrs	8 hrs		



LED/160R Complete with a unique Li-ion Battery with in-built micro USB port

ORDERING INFORMATION				
CAT NR.	ORD NR.	SIZE (L×H×D)		BOX QTY.
		(INCH)	(MM)	
LED/160	55073	6 × 19/32 × 45/64	152 × 15 × 17.5	36
LED/160R	55095	6 × 19/32 × 45/64	152 × 15 × 17.5	36



SCAN TO WATCH

Heavy duty multi-mode flashlight,
laser light & UV pointer all in one

Light Output

Multiple mode output with just the
press of a button

Robust Construction

- IP 54 Rated**
Protected against dust and
effects of water spray from any
direction
- Military grade anodised coating
for enhanced durability
- Robust aluminium body makes
the light usable even in rugged
condition
- Non-slip knurled grip
- Integrated pocket clip for easy
and safe portability

Unique L-Head Design

Head can be turned 90° giving the
user freedom to direct light beam
as required

Hands Free Operation

Super strong magnet at the rear
end can be affixed onto any
metallic surface leaving both
hands free

Available in two versions

- Drycell: LED-170**
Runs on 3xAAA drycell
batteries
- Rechargeable: LED-170R**
Runs on 3.7V 2600mAh
rechargeable battery


FEATURES

BEAM ANGLE	
20°	
WATER & DUST PROOF RATING	UV BANDWIDTH
IP54	395NM
OPERATING TEMPERATURE	
-20°C TO +50°C (68°F TO 122°F)	

ORDERING INFORMATION

CAT NR.	ORD NR.	SIZE (L×H×D)		BOX QTY
		(INCH)	(MM)	
LED/170	55074	5-7/8 × 1-29/64 × 1-11/64	149 × 37 × 30	36
LED/170R	55080	5-7/8 × 1-29/64 × 1-11/64	149 × 37 × 30	36

LED-170 DRYCELL



3 × AAA
BATTERIES
(not included)


MAX. LUMEN	BEAM DISTANCE
300	66M (216')



Multiple Mode Output

	1ST PRESS	2ND PRESS	3RD PRESS	4TH PRESS & HOLD	5TH PRESS	6TH PRESS
	HIGH INTENSITY	MEDIUM INTENSITY	LOW INTENSITY	LASER LIGHT	LASER LIGHT & HIGH INTENSITY	UV LIGHT
LUMEN	300	100	30	-	300	-
RUN TIME	3 hrs	7 hrs	20 hrs	-	3 hrs	-

LED-170R RECHARGEABLE



RECHARGEABLE
BATTERY
3.7V 2600 mAh

MAX. LUMEN	BEAM DISTANCE
500	100M (328')



Multiple Mode Output

	1ST PRESS	2ND PRESS	3RD PRESS	4TH PRESS & HOLD	5TH PRESS	6TH PRESS
	HIGH INTENSITY	MEDIUM INTENSITY	LOW INTENSITY	UV LIGHT	LASER LIGHT	LASER LIGHT & HIGH INTENSITY
LUMEN	500	250	90	-	-	500
RUN TIME	2 hrs	6 hrs	12 hrs	-	-	2 hrs



Multiple mode output with
just the press of a button



Micro USB port with
rubberised bezel for charging

NEW!
CE RoHS CREE



SCAN TO
WATCH

30 Telescopic Magnetic Pick-Up Light

LED-131

LED-132R

Dual Purpose Light

High quality 0.5W flashlight with magnetic telescopic pick up

Light Output

Focussed light beam of 30 lumen helps reach out in dark areas

Robust Construction

- a. Durable aluminium body
- b. Flexible telescopic design to reach out into narrow holes & crevices
- c. Magnet at the front end to pick up small metallic parts conveniently
- d. Adjustable focus to direct light beam as per need
- e. Integrated pocket clip for convenient and safe carrying around

Hands Free Use

Magnet at the rear end of light can be affixed onto any metallic surface leaving both hands free

Available in two versions

- a. **Drycell: LED-131**
Runs on 4x1.5LR44 drycell batteries
- b. **Rechargeable: LED-132R**
Runs on 450 mAh lithium-ion battery

FEATURES


LUMEN	RUN TIME
30	4 H
BEAM ANGLE	BEAM DISTANCE
15°	10M (32')
OPERATING TEMPERATURE	
-10°C TO 40°C (33.8°F TO 104°F)	

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
LED/131	55053	100
LED/132R	55079	100




LED-131 DRYCELL



4 × 1.5LR44 BATTERIES (included)



LED-132R RECHARGEABLE



RECHARGEABLE BATTERY 450 mAh



NEW!



USB Charging: Simply connect the light to wall charger, laptop etc. for convenient charging

7W LED handheld spotlight & worklight
7W CREE® LED, Xm-L2


Light Output

High quality, super-bright, focussed,
user controlled multiple mode output

100% Waterproof Construction


- IP67 Rated**
Protected against dust & effects of water immersion upto 1 metre
- Designed to float**
- Shock proof & lightweight ABS body, rubber head & ergonomic TPR grip
- Shock-proof polycarbonate lens
- Waterproof trigger to control light modes
- Integrated fold out stand converts hand-held spot light into a worklight
- Lanyard with SOS whistle

Power Source




RECHARGEABLE
BATTERY
3.7V 2200 mAh

Charging of Battery



AC CHARGER
(100-240V)

CHARGE TIME
4-5 HOURS



DC CAR
CHARGER
(12-24V)

CHARGE TIME
3-4 HOURS

Multiple Mode Output

	1ST PRESS	2ND PRESS	3RD PRESS	4TH PRESS & HOLD
TYPE	HIGH INTENSITY	LOW INTENSITY	SOS FLASHING	RED FLASHING
LUMEN	700	350	●●●●●●●●	●●●●●●●●
RUN TIME	1.5 -2 hrs	4 - 4.5 hrs		

FEATURES

MAX. LUMEN	WATER & DUST PROOF RATING	BEAM DISTANCE	BEAM ANGLE	OPERATING TEMPERATURE
700	IP67	400M (1312')	70°	-10°C TO +45°C (33.8°F TO 140°F)

ORDERING INFORMATION

CAT NR.	ORD NR.	BOX QTY.
LED/402	55083	100



Floats in water



Integrated fold out stand converts hand held spotlight into a worklight



SCAN TO
WATCH



HEAD LAMPS

High quality aluminium alloy head lamp with excellent water resistance

Innovative Design

Light can be separated from head band & used as a flashlight

Light Output

Powerful multiple output with bright and balanced illumination

Robust Construction


- IP 65 Rated**
Protected against dust and effects of low pressure water jet from any direction
- Black woven high quality, anti-skid head band with soft built-in protection to avoid imprint on forehead
- Flashlight: robust aluminium alloy body with military grade anodised coating for enhanced durability
- Flashlight has an integrated pocket clip for convenient & safe portability

Hands Free Operation


Super strong Magnet at the rear end of the light latches onto any metallic surface, leaving both hands free

Dual Power Source

Dual power smart cell design enables the light to be used with:

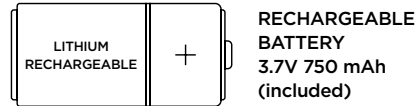

RECHARGEABLE BATTERY
3.7V 750 mAh
(included)

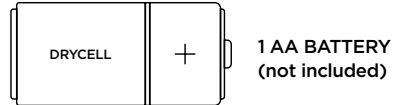

1 AA BATTERY
(not included)



USB CHARGED

Charge Time

4 hours

FEATURES

MAX. LUMEN	BEAM ANGLE	BEAM DISTANCE
130	12°	75M (246')
WATER & DUST PROOF RATING	OPERATING TEMPERATURE	
IP65	-20°C TO 45°C (-4°F TO 113°F)	

ORDERING INFORMATION

CAT NR.	ORD NR.	SIZE (L×H×D)		BOX QTY.
		(INCH)	(MM)	
LED/240	55072	5 × 1 × 1-3/16	126 × 26 × 30	36



DETACHABLE DESIGN
Simply pull out the light from the head band frame, to use as mini flashlight



Complete with a unique Li-ion Battery with in-built micro USB port



Rotate light to focus at required angle

Multiple Mode Output

	1ST PRESS	2ND PRESS	3RD PRESS & HOLD	4TH PRESS
	FULL INTENSITY	LOW INTENSITY	QUICK FLASHING	SOS FLASHING
LUMEN	130	30	●●●●●●●●	●●●●●●●●
RUN TIME	3 hours	13 hours		



SCAN TO WATCH

Powerful 3W COB head lamp for superior hands free illumination. A must - have for every professional user

Innovative & Unique Design

- Detachable Design: Light can be separated from head band and used as a worklight
- In-built sensor function with hands free ON/OFF. Wave to activate/deactivate light


Light Output

Powered by COB LED technology, the GROZ LED/220 provides extremely powerful multiple output with bright and even illumination

Ergonomic Construction

- Impact proof ABS light
- Black woven head band with soft built-in protection pad to avoid imprint on forehead
- Light attached to head band with a strong & powerful magnet
- Light can be easily rotated to focus at required angle

Power Source



RECHARGEABLE BATTERY
3.7V 2200 mAh



USB CHARGED

Charging of Battery

Battery can be recharged using a standard 1m long USB cable, provided with the light

Charge Time

4 hours

FEATURES


MAX. LUMEN	BEAM ANGLE	BEAM DISTANCE	OPERATING TEMPERATURE
150	120°	15M (50')	-20°C TO 40°C (-4°F TO 104°F)

ORDERING INFORMATION

CAT NR.	ORD NR.	SIZE (L×H×D)		BOX QTY.
		(INCH)	(MM)	
LED/220	55052	1-57/64 × 1-1/2 × 3-5/32	48 × 38 × 80	24



Hands Free Sensor:
Wave to activate/deactivate light

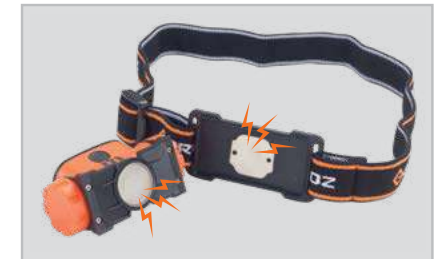

Detachable Design
The light is attached to the head band with the help of a magnet



SCAN TO WATCH



Rotate light to focus at required angle

Multiple Mode Output

	NORMAL MODE			SENSOR MODE
	1ST PRESS	2ND PRESS	3RD PRESS	PRESS & HOLD
	High Intensity	Low Intensity	Quick Flashing	High Intensity
LUMEN	150	35	●●●●●●●●	150
RUN TIME	4 hours	12 hours		4 hours

34

3W LED Headlamp With Sensor

LED-206

Superior 3W LED headlamp for use in automotive, plant maintenance & construction applications

Superior Design

- In-built sensor function with hands free ON/OFF. Wave to activate/deactivate light
- In-built zoom feature

Light Output


Super bright LED light with extra power CREE XPE light output in multiple modes

Ergonomic Construction

- Impact Resistant ABS light with 90° swivel
- Black woven head band with soft built-in protection pad to avoid imprint on forehead

Built-in Zoom feature

Power Source



3 × AAA ALKALINE BATTERY (Included)

CE RoHS CREE



Hands Free Sensor: Wave to activate/deactivate light



FEATURES

LUMEN	BEAM DISTANCE
120	10M (32')
OPERATING TEMPERATURE	
-20°C TO 45°C (-4°F TO 140°F)	

Multiple Mode Output

	ORANGE BUTTON			WHITE BUTTON
	1ST PRESS	2ND PRESS	3RD PRESS	PRESS ONCE TO ACTIVATE HAND SENSOR
	Red Light	Hazard Flasher	Main Light	Main Light
LUMEN	-	-	120	120
RUN TIME	-	-	6 hours	6 hours

ORDERING INFORMATION

CAT NR.	ORD NR.	SIZE (L×H×D)		BOX QTY.
		(INCH)	(MM)	
LED/206	55082	2 × 2-15/32 × 1-21/32	50 × 62.5 × 42	25

35

3W COB Head Lamp

LED-230

Versatile headlamp with dual output; spot light & floodlight in one

Provides light near & far making it ideal for professional use

Unique Combination Design

Packs a focus light & floodlight in one with 1W centre light for focussed beam & 3W COB circumference flooding light


Light Output

Outstandingly bright COB light for highly bright & uniform output

Sturdy Construction

- Adjustable head band with built-in protection pad to avoid imprint of forehead
- Impact proof ABS light
- Light adjustable up to 45° to direct light beam as per need

Power Source




3 × AAA ALKALINE BATTERY (Included)

CE



FEATURES

MAX. LUMEN	OPERATING TEMPERATURE
160	-20°C TO 45°C (-4°F TO 140°F)
BEAM ANGLE LED LIGHT	BEAM ANGLE COB LIGHT
90°	120°
BEAM DISTANCE LED LIGHT	BEAM DISTANCE COB LIGHT
80M (262')	50M (164')

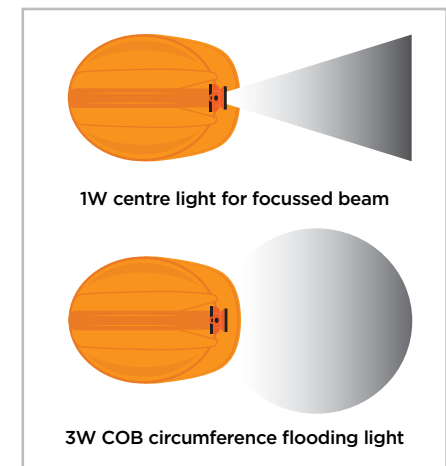

Multiple Mode Output

	1ST PRESS	2ND PRESS	3RD PRESS
	LED Light	COB Light	Quick Flashing
LUMEN	70	160	00000000
RUN TIME	9 hrs	3 hours	

ORDERING INFORMATION

CAT NR.	ORD NR.	SIZE (L×H×D)		BOX QTY.
		(INCH)	(MM)	
LED/230	55055	2-1/16 × 2-9/16 × 2-3/16	52 × 65 × 55	40

36

12W LED Floodlight

LED-505

12W LED Floodlight

4 Powerful LED's of 3W each

Light Output

High quality output of 840 lumen with a spread of 60° over a distance up to 60 meter

Weather Proof Construction

a. IP67 Rated


Protected against dust and effects of water immersion up to 1 meter

b. Corrosion resistant aluminium die cast construction in premium powder coated finish

c. Sturdy polycarbonate lens to withstand the toughest of job site conditions

d. Corrosion resistant stainless steel bracket

Power Source



DC POWERED
10V DC - 30V DC

Complete with 8" (200 mm) DC power cord





Ideal for Outdoor Use

Use on off-road vehicles, construction equipment, tractors, farm machinery, service vans, on mining sites etc.

CE RoHS CREE




FEATURES

LUMEN	BEAM ANGLE	BEAM DISTANCE
 840	 60°	 60M (197')
WATER & DUST PROOF RATING	OPERATING TEMPERATURE	
 IP67	-20°C TO 45°C (-4°F TO 113°F)	



ORDERING INFORMATION

CAT NR.	ORD NR.	SIZE (L×H×D)		BOX QTY.
		(INCH)	(MM)	
LED/505	55064	3-5/32 × 3 × 3-7/32	80 × 75 × 82	20



FLOODLIGHTS

37 15W LED Floodlight

LED-501


LED-502



15W LED Floodlight
5 powerful LED's of 3W each

Light Output
High quality output of 900 lumen with a powerful flood spread of 60° over a distance up to 10 meter

- Weather Proof Construction**
- a. **IP 67 Rated**
Protected against dust and effects of water immersion up to 1 meter
 - b. Corrosion resistant aluminium die-cast construction in premium powder coated finish
 - c. Sturdy polycarbonate lens to withstand the toughest of job site conditions
 - d. Corrosion resistant stainless steel bracket

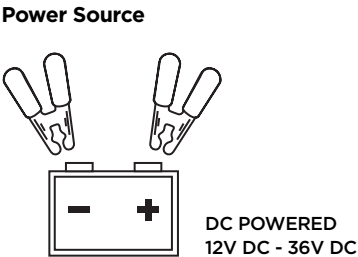

Complete with 20" (500mm) DC power cord

Available as a single piece or set of two

Ideal for Outdoor Use
Use on off-road vehicles, construction equipment, tractors, farm machinery, service vans, on mining sites etc.

FEATURES

LUMEN	BEAM ANGLE	BEAM DISTANCE
900	60°	10M (32')
WATER & DUST PROOF RATING	OPERATING TEMPERATURE	
IP67	-20°C TO 45°C (-4°F TO 113°F)	



ORDERING INFORMATION

CAT NR.	ORD NR.	DESCRIPTION	SIZE (L×H×D)		BOX QTY.
			(INCH)	(MM)	
LED/501	55016	Single Piece	3-11/32 × 3-11/32 × 1-3/8	85 × 85 × 35	27
LED/502	55026	Set of Two	3-11/32 × 3-11/32 × 1-3/8	85 × 85 × 35	13



38 15W LED 'Super Cool' Floodlight


LED-520



15W LED Floodlight
5 powerful LED's of 3W each

Light Output
Super cool light offers high quality output of 1050 lumen with a powerful flood spread of 60° over a distance up to 10 meter

- Weather Proof Construction**
- a. **IP 67 Rated**
Protected against dust and effects of water immersion up to 1 meter
 - b. Corrosion resistant aluminium die-cast construction in premium powder coated finish
 - c. Sturdy polycarbonate lens to withstand the toughest of job site conditions
 - d. Tight rubber sealing prevents ingress of dust and moisture
 - e. Corrosion resistant stainless steel bracket

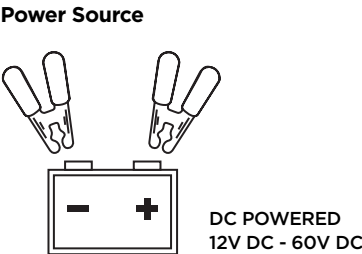

Complete with 20" (500mm) DC power cord

Ideal for Outdoor Use
Use on off-road vehicles, construction equipment, tractors, farm machinery, service vans, on mining sites etc.


FEATURES

LUMEN	BEAM ANGLE	BEAM DISTANCE
1050	60°	10M (32')
WATER & DUST PROOF RATING	OPERATING TEMPERATURE	
IP67	-20°C TO 45°C (-4°F TO 113°F)	



ORDERING INFORMATION

CAT NR.	ORD NR.	SIZE (L×H×D)		BOX QTY.
		(INCH)	(MM)	
LED/520	55027	4 × 4-13/16 × 1-7/8	101 × 122 × 48	12



39

18W LED 'Super Cool' Floodlight

LED-530

The most versatile floodlight for any application


18W LED Floodlight
6 powerful LED's of 3W each

Light Output
Super cool light offers high quality output of 1200 lumen with a powerful flood spread of 60° over a distance up to 10 meter

Weather Proof Construction

- IP67 Rated**
Protected against dust and effects of water immersion up to 1 meter
- Corrosion resistant aluminium die-cast construction in premium powder coated finish
- Sturdy polycarbonate lens to withstand the toughest of job site conditions
- Tight rubber sealing prevents ingress of dust and moisture
- Corrosion resistant stainless steel bracket

Power Source



DC POWERED
12V DC - 60V DC

Complete with 20' (500mm) DC power cord

Ideal for Outdoor Use

Use on off-road vehicles, construction equipment, tractors, farm machinery, service vans, on mining sites etc.

FEATURES


LUMEN	BEAM ANGLE	BEAM DISTANCE
1200	60°	10M (32')
WATER & DUST PROOF RATING	OPERATING TEMPERATURE	
IP67	-20°C TO 45°C (-4°F TO 113°F)	

ORDERING INFORMATION

CAT NR.	ORD NR.	SIZE (L×H×D)		BOX QTY.
		(INCH)	(MM)	
LED/530	55028	4-9/32 × 5 × 1-21/32	109 × 127 × 42	12



Directs light beam to required direction

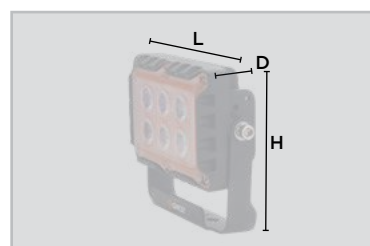

40

27W LED Floodlight

LED-512

High output, super bright illumination over long distances


27W LED Floodlight
9 powerful LED's of 3W each

Light Output
High quality output of 1890 lumen with a powerful flood spread of 60° over a distance up to 80 meter

Weather Proof Construction

- IP 67 Rated**
Protected against dust and effects of water immersion up to 1 meter
- Corrosion resistant aluminium die-cast construction in premium powder coated finish
- Sturdy polycarbonate lens to withstand the toughest of job site conditions
- Corrosion resistant stainless steel bracket

Power Source



DC POWERED
9V DC - 32V DC

Complete with 18' (450mm) DC power cord

Ideal for Outdoor Use

Use on off-road vehicles, construction equipment, tractors, farm machinery, service vans, on mining sites etc.




SCAN TO WATCH

FEATURES

LUMEN	BEAM ANGLE	BEAM DISTANCE
1890	60°	80M (262')
WATER & DUST PROOF RATING	OPERATING TEMPERATURE	
IP67	-20°C TO 45°C (-4°F TO 113°F)	

ORDERING INFORMATION

CAT NR.	ORD NR.	SIZE (L×H×D)		BOX QTY.
		(INCH)	(MM)	
LED/512	55061	4-1/4 × 4-1/4 × 2-27/32	108 × 108 × 72	20



41

30W LED Floodlight

LED-545

High output super bright floodlight for 'On-the-Go' use

30W LED Floodlight

6 powerful LED's of 5W each


Light Output

High quality output of 2250 lumen with a powerful flood spread of 60° over a distance up to 60 meter

Weather Proof Construction

- IP 67 Rated**
Protected against dust and effects of water immersion up to 1 meter
- Corrosion resistant aluminium die-cast construction in premium powder coated finish
- Sturdy polycarbonate lens to withstand the toughest of job site conditions
- Corrosion resistant stainless steel bracket

Power Source



DC POWERED
9V DC - 32V DC

Complete with 8" (200mm) DC power cord

Ideal for Outdoor Use

Use on off-road vehicles, construction equipment, tractors, farm machinery, service vans, on mining sites etc.

CE RoHS CREE



FEATURES

LUMEN	BEAM ANGLE	BEAM DISTANCE
2250	60°	60M (196')
WATER & DUST PROOF RATING	OPERATING TEMPERATURE	
IP67	-20°C TO 45°C (-4°F TO 113°F)	

ORDERING INFORMATION

CAT NR.	ORD NR.	SIZE (L×H×D)		BOX QTY.
		(INCH)	(MM)	
LED/545	55065	6 × 2-1/16 × 2-9/32	150 × 52.5 × 56	20



42

45W LED Floodlight

LED-541

High output super bright floodlight for long distance visibility

45W LED Floodlight

15 powerful LED's of 3W each


Light Output

High quality output of 3150 lumen with a powerful flood spread of 60° over a distance up to 80 meter

Weather Proof Construction

- IP 67 Rated**
Protected against dust and effects of water immersion up to 1 meter
- Corrosion resistant aluminium die-cast construction in premium powder coated finish
- Sturdy polycarbonate lens to withstand the toughest of job site conditions
- Corrosion resistant stainless steel bracket

Power Source



DC POWERED
9V DC - 32V DC

Complete with 18" (450mm) DC power cord

Ideal for Outdoor Use

Use on off-road vehicles, construction equipment, tractors, farm machinery, service vans, on mining sites etc.

CE RoHS



FEATURES

LUMEN	BEAM ANGLE	BEAM DISTANCE
3150	60°	80M (262')
WATER & DUST PROOF RATING	OPERATING TEMPERATURE	
IP67	-20°C TO 45°C (-4°F TO 113°F)	

ORDERING INFORMATION

CAT NR.	ORD NR.	SIZE (L×H×D)		BOX QTY.
		(INCH)	(MM)	
LED/541	55063	6-7/32 × 3-23/32 × 3	158 × 95 × 75	12



43 45W LED Floodlight

LED-515


Brightest floodlight on site

48W LED Floodlight
16 powerful LED's of 3 W each

Light Output
High quality output of 3360 lumen with a powerful flood spread up to 60° wide and over a distance up to 80 meter

- Weather Proof Construction
- a. IP 67 Rated
Protected against dust and effects of water immersion up to 1 meter
 - b. Corrosion resistant aluminium die -cast construction in premium powder coated finish
 - c. Sturdy polycarbonate lens to withstand the toughest of job site conditions
 - d. Corrosion resistant stainless steel bracket

Power Source

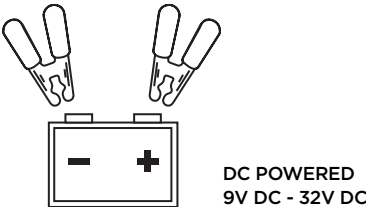

Complete with 18" (450mm) DC power cord


Ideal for Outdoor Use
Use on off-road vehicles, construction equipment, tractors, farm machinery, service vans, on mining sites etc.

FEATURES

LUMEN	BEAM ANGLE	BEAM DISTANCE
3360	60°	80M (262')
WATER & DUST PROOF RATING	OPERATING TEMPERATURE	
IP67	-20°C TO 45°C (-4°F TO 113°F)	

ORDERING INFORMATION

CAT NR.	ORD NR.	SIZE (L×H×D)		BOX QTY.
		(INCH)	(MM)	
LED/515	55062	4-1/4 × 5-13/32 × 2-27/32	108 × 138 × 72	20



SCAN TO WATCH



LIGHT BARS

44 36W LED Light Bar

LED-701

36W LED Light Bar

12 powerful LED's of 3W each

Light Output

High quality output of 2520 lumen


Combination Beam

Floodlight & spotlight in one; powerful flood spread & concentrated bright spot illumination are ideal for projecting light to long distances & keeping surrounding areas bright

Weather Proof Construction

- a. IP 67 Rated
Protected against dust and effects of water immersion up to 1 meter
- b. Corrosion resistant aluminium extruded housing in premium powder coated finish
- c. Sturdy polycarbonate lens to withstand the toughest of job site conditions

Power Source



DC POWERED
10V DC - 30V DC

Complete with 20" (500mm) DC power cord

Ideal for Outdoor Use

Use on off-road vehicles, roof top of ATV's, UTV's, construction equipment, tractors, farm machinery, SUV's etc

FEATURES

LUMEN	WATER & DUST PROOF RATING
2520	IP67
OPERATING TEMPERATURE	
-20°C TO 45°C (-4°F TO 113°F)	


CE RoHS CREE



SCAN TO WATCH


270°
Rotation

COMBINATION BEAM



FLOODLIGHT
SPOTLIGHT

	FLOODLIGHT	SPOTLIGHT	FLOODLIGHT
BEAM ANGLE	60°	30°	60°
BEAM DISTANCE	100M (328')	200M (656')	100M (328')



ORDERING INFORMATION

CAT NR.	ORD NR.	SIZE (L×H×D)		BOX QTY.
		(INCH)	(MM)	
LED/701	55066	8 × 4-17/32 × 3-11/32	204 × 115 × 85	12

45 72W LED Light Bar

LED-711

72W LED Light Bar

24 powerful LED's of 3W each

Light Output

High quality output of 5040 lumen


Combination Beam

Floodlight & spotlight in one; powerful flood spread & concentrated bright spot illumination are ideal for projecting light to long distances & keeping surrounding areas bright

Weather Proof Construction

- a. IP 67 Rated
Protected against dust and effects of water immersion up to 1 meter
- b. Corrosion resistant aluminium extruded housing in premium powder coated finish
- c. Sturdy polycarbonate lens to withstand the toughest of job site conditions

Power Source



DC POWERED
10V DC - 30V DC

Complete with 20" (500mm) DC power cord

Ideal for Outdoor Use

Use in mining applications, on off-road vehicles, roof top of ATV's, UTV's, construction equipment, tractors, farm machinery, SUV's etc.


CE RoHS CREE



SCAN TO WATCH


270°
Rotation

COMBINATION BEAM



FLOODLIGHT
SPOTLIGHT

	FLOODLIGHT	SPOTLIGHT	FLOODLIGHT
BEAM ANGLE	60°	30°	60°
BEAM DISTANCE	100 (328')	200 (656')	100 (328')

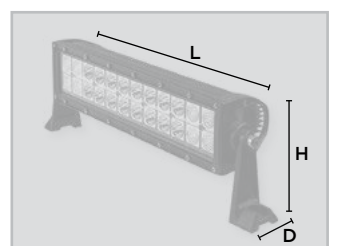

FEATURES

LUMEN	WATER & DUST PROOF RATING
5040	IP67
OPERATING TEMPERATURE	
-20°C TO 45°C (-4°F TO 113°F)	

ORDERING INFORMATION

CAT NR.	ORD NR.	SIZE (L×H×D)		BOX QTY.
		(INCH)	(MM)	
LED/711	55067	14 × 4-17/32 × 3-11/32	357 × 115 × 85	12



46

120W LED Light Bar


LED-721

120W LED Floodlight
40 powerful LED's of 3W each

Light Output
High quality output of 8400 lumen

Combination Beam
Floodlight & spotlight in one; powerful flood spread & concentrated bright spot illumination are ideal for projecting light to long distances & keeping surrounding areas bright

- Weather Proof Construction
- a. IP 67 Rated
Protected against dust and effects of water immersion up to 1 meter
 - b. Corrosion resistant aluminium extruded housing in premium powder coated finish
 - c. Sturdy polycarbonate lens to withstand the toughest of job site conditions

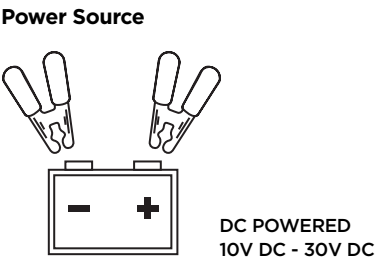


Complete with 20" (500mm) DC power cord

Ideal for Outdoor Use
Use in mining applications, on off-road vehicles, roof top of ATV's, UTV's, construction equipment, tractors, farm machinery, SUV's etc

LUMEN	WATER & DUST PROOF RATING
8400	IP67
OPERATING TEMPERATURE	
-20°C TO 45°C (-4°F TO 113°F)	


COMBINATION BEAM



	FLOODLIGHT	SPOTLIGHT	FLOODLIGHT
BEAM ANGLE	60°	30°	60°
BEAM DISTANCE	100 (328')	200 (656')	100 (328')

ORDERING INFORMATION

CAT NR.	ORD NR.	SIZE (L×H×D)		BOX QTY
		(INCH)	(MM)	
LED/721	55068	22-1/8 × 4-17/32 × 3-11/32	562 × 115 × 85	6



WHY US?



GROZ presents the industry's premium line of high performance LED lights. All lights have been carefully designed and manufactured with improved light output, battery capacity, ergonomics, durability, user-friendliness and functionality. Incorporating the latest technology, these are ideal for the professional users in industry, automotive, construction, agricultural, mining, adventure and several other outdoor applications.

LED technology is amongst the fastest evolving technologies. Due to our distinctive strength in product design, manufacturing and in-house know-how we have the capability to constantly upgrade our product line and pursue new opportunities. We strive to be an active partner for our customers and users and constantly work on providing, technical know-how, marketing and service support to help sell the product.





**Groz Engineering Tools (P) Ltd.
Groz Net Industries**

Village Kherki Daula, National Highway-8
Gurugram -122001, Haryana, INDIA
TEL +91.124.282.7700
FAX +91.124.282.7986
FAX USA +1.509.271.7848
FAX UK +44.870.121.1854
E-MAIL info@groz-tools.com
URL www.groz-tools.com

CONNECT WITH US!

